

CMUnited-98: A Team of Robotic Soccer Agents

Manuela Veloso, Michael Bowling, Sorin Achim, Kwun Han, and Peter Stone

Computer Science Department
Carnegie Mellon University
Pittsburgh, PA 15213
<http://www.cs.cmu.edu/~robosoccer>

Abstract

In this paper, we present the main research contributions of our champion CMUnited-98 small robot team. The team is a multi-agent system in the robotic soccer entertainment application area. The robotic system has global perception and distributed cognition and action. We describe the main features of the hardware design of the physical robots, including differential drive, robust mechanical structure, and a kicking device. We briefly overview the CMUnited-98 global vision processing algorithm. We then introduce our new robot motion algorithm which reactively generates motion control to account for the target point, the desired robot orientation, and obstacle avoidance. Our robots exhibit successful collision-free motion in the highly dynamic robotic soccer environment. At the strategic and decision-making level, we present the role-based behaviors of the CMUnited-98 robotic agents. Team collaboration is remarkably achieved through a new algorithm that allows for team agents to anticipate possible collaboration opportunities. Robots position themselves strategically in open positions that increase passing opportunities. The paper terminates with a summary of the results of the RoboCup-98 games in which the CMUnited-98 small robot team scored a total of 25 goals and suffered 6 goals in the 5 games that it played.

Introduction

The CMUnited-98 small-size robot team is a complete, autonomous architecture composed of the physical robotic agents, a global vision processing camera over-looking the playing field, and several clients as the minds of the small-size robot players.

The complete system is fully autonomous consisting of a well-defined and challenging processing cycle. The global vision algorithm perceives the dynamic environment and processes the images, giving the positions of each robot and the ball. This information is sent to an off-board controller and distributed to the different agent algorithms. Each agent evaluates the world state and uses its strategic knowledge to make decisions. Actions are motion commands that are sent by the off-board controller through radio frequency communication. Commands can be broadcast or sent directly to individual agents. Each robot has an identification binary code that is used on-board to detect commands intended for that robot. Motion is not perfectly executed due to inherent mechanical inaccuracies

and unforeseen interventions from other agents. The effects of the actions are therefore uncertain.

CMUnited-98 represents a seamless integration of reactive and strategic reasoning and real physical action in teams of robots. Robotic soccer is a growing application both in the research and in the entertainment communities (Kitano *et al.* 1997) (see <http://www.robocup.org/RoboCup/>).

Hardware and Vision Processing

The physical robots themselves are of size 15cm × 12cm × 10cm. Figure 1 shows our robots. A differential drive mechanism is used in all of the robots. Two motors with integrated gear boxes are used for the two wheels. Differential drive was chosen due to its simplicity and due to the size constraints. The size of our robots conforms to RoboCup Competition rules. Employing the differential drive mechanism means that the robot is non-holonomic, which makes the robot control problem considerably more challenging.



Figure 1: The CMUnited-98 robots.

The CMUnited-98 robots are entirely new constructions built upon our experience in 1997 (Veloso, Stone, & Han 1998). The new robots represent an upgrade of our own-built CMUnited-97 robots. Improvements were made in two major areas: motors and control, and the mechanical chassis, which includes a kicking device.

In designing the mechanical structure of the CMUnited-98 robots, we focused on modularity and robustness. The final design includes a battery module supplying three independent power paths (for the main-board, motors, and radio modules.) It also includes a single board containing all the required electronic circuitry, with multiple add-on capabilities. The

mobile base module includes a kicking device driven by a DC motor. This motor is hardware activated by an array of four infrared sensors, which is enabled or disabled by the software control. This was all combined in a layered design within an aluminum and plastic frame. In addition, each of the modules within this design is completely interchangeable.

The CMUnited-98 vision module remains largely the same as the one used in the CMUnited-97 team (Han & Veloso 1998). The algorithm successfully detects and tracks 11 objects (5 teammates, 5 opponents and a ball) at 30 frames/s. The algorithm determines a position and orientation for the robots. In addition a Kalman-Bucy filter is used as a predictor of the ball's trajectory. This prediction is an integral factor in our robots' control and strategic decisions.

Motion Control

The goal of our low level motion control is to be as fast as possible while remaining accurate and reliable. This is challenging due to the lack of feedback from the motors, forcing all control to be done using only visual feedback. Our motion control algorithm is robust. It addresses stationary and moving targets with integrated obstacle avoidance. The algorithm makes effective use of the prediction of the ball's trajectory provided by the Kalman-Bucy filter.

We achieve this motion control functionality by a reactive control mechanism that directs a differential drive robot to a target configuration. Though based on the CMUnited-97's motion control (Veloso, Stone, & Han 1998), CMUnited-98 includes a number of major improvements. The target configuration for the motion planner has been extended. The target configuration includes: (i) the *Cartesian position*; and (ii) the *direction* that the robot is required to be facing when arriving at the target position. Obstacle avoidance is integrated into this controller. Also, the target configuration can be given as a function of time to allow for the controller to reason about intercepting the trajectory of a moving target.

Differential Drive Control for Position and Direction

CMUnite- 98's basic control rules were improved from those used in CMUnite- 97. The rules are a set of reactive equations for deriving the left and right wheel velocities, v_l and v_r , in order to reach a target position, (x^*, y^*) :

$$\begin{aligned} \Delta &= \theta - \phi \\ (t, r) &= (\cos^2 \Delta \cdot \operatorname{sgn}(\cos \Delta), \sin^2 \Delta \cdot \operatorname{sgn}(\sin \Delta)) \\ v_l &= v(t - r) \\ v_r &= v(t + r), \end{aligned} \tag{1}$$

where θ is the direction of the target point (x^*, y^*) , ϕ is the robot's orientation, and v is the desired speed (see Figure 2(a)).¹

¹All angles refer to a fixed coordinate system.

We extend these equations for target configurations of the form (x^*, y^*, ϕ^*) , where the goal is for the robot to reach the specified target point (x^*, y^*) while facing the direction ϕ^* . This is achieved with the following adjustment:

$$\theta' = \theta + \min\left(\alpha, \tan^{-1}\left(\frac{c}{d}\right)\right),$$

where θ' is the new target direction, α is the difference between our angle to the target point and ϕ^* , d is the distance to the target point, and c is a clearance parameter (see Figure 2(a).) This will keep the robot a distance c from the target point while it is circling to line up with the target direction, ϕ^* . This new target direction, θ' , is now substituted into equation 1 to derive wheel velocities.

In addition to our motion controller computing the desired wheel velocities, it also returns an estimate of the time to reach the target configuration, $\hat{T}(x^*, y^*, \phi^*)$. This estimate is a crucial component in our robot’s strategy. It is used both in high-level decision making, and for low-level ball interception, which is described later in this section. For CMUnited-98, $\hat{T}(x^*, y^*, \phi^*)$ is computed using a hand-tuned linear function of d , α , and Δ .

Obstacle Avoidance

Obstacle avoidance was also integrated into the motion control. This is done by adjusting the target direction of the robot based on any immediate obstacles in its path. This adjustment can be seen in Figure 2(b).

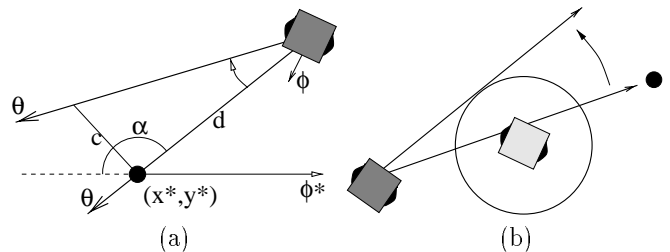


Figure 2: (a) The adjustment of θ to θ' to reach a target configuration of the form (x^*, y^*, ϕ^*) ; (b) The adjustment to avoid immediate obstacles.

If a target direction passes too close to an obstacle, the direction is adjusted to run tangent to the a preset allowed clearance for obstacles. Since the motion control mechanism is running continuously, the obstacle analysis is constantly replanning obstacle-free paths. This continuous replanning allows for the robot to handle the highly dynamic environment and immediately take advantage of short lived opportunities.

Moving Targets

One of the real challenges in robotic soccer is to be able to control the robots to intercept a moving ball. This capability is essential for a high-level ball passing behavior. CMUnited-98's robots successfully intercept

a moving ball and several of their goals in RoboCup-98 were scored using this capability.

This interception capability is achieved as an extension of the control algorithm to aim at a stationary target. Our extension allows for the target configuration to be given as a function of time, where $t = 0$ corresponds to the present,

$$f(t) = (x^*, y^*, \phi^*).$$

At some point in the future, t_0 , we can compute the target configuration, $f(t_0)$. We can also use our control rules for a stationary point to find the wheel velocities and estimated time to reach this hypothetical target as if it were stationary. The time estimate to reach the target then informs us whether it is possible to reach it within the allotted time. Our goal is to find the nearest point in the future where the target can be reached. Formally, we want to find,

$$t^* = \min\{t > 0 : \hat{T}(f(t)) \leq t\}.$$

After finding t^* , we can use our stationary control rules to reach $f(t^*)$. In addition we scale the robot speed so to cross the target point at exactly t^* .

Unfortunately, t^* cannot be easily computed within a reasonable time frame. We approximate the value t^* by discretizing time with a small time step. The algorithm finds the closest of these discretized time points that satisfies our estimate constraint. The target configuration as a function of time is computed using the ball's predicted trajectory. Our control algorithm for stationary points is then used to find a path and time estimates for each discretized point along this trajectory, and the appropriate target point is selected.

Strategy

The main focus of our research is on developing algorithms for collaboration between agents in a team. An agent, as a member of the team, needs to be capable of individual autonomous decisions while, at the same time, its decisions must contribute towards the team goals.

CMUnited-97 introduced a flexible team architecture in which agents are organized in *formations* and *units*. Each agent plays a *role* in a unit and in a formation (Stone & Veloso 1998; Veloso, Stone, & Han 1998). CMUnited-98 builds upon this team architecture by defining a set of roles for the agents. It also introduces improvements within this architecture to help address the highly dynamic environment.

CMUnited-98 uses the following roles: goalkeeper, defender, and attacker. The formation used throughout RoboCup-98 involved a single goalkeeper and defender, and three attackers.

goalkeeper

The ideal goalie behavior is to reach the expected entry point of the ball in the goal *before* the ball reaches it. Assuming that the prediction of the ball trajectory is correct and the robot has a uniform movement, we can

state the ideal goalie behavior: given the predicted v_g and v_b as the velocities of the goalie and of the ball respectively, and d_g and d_b as the distances from the goalie and the ball to the predicted entry point, then, we want $\frac{d_g}{v_g} = \frac{d_b}{v_b} - \epsilon$, where ϵ is a small positive value to account for the goalie reaching the entry point slightly before the ball.

Unfortunately, the ball easily changes velocity and the movement of the robot is not uniform and is uncertain. Therefore we have followed a switching behavior for the goalie based on a threshold of the ball's estimated trajectory.

If the ball's estimated speed is higher than a preset threshold, the goalie moves directly to the ball's predicted entry goal point. Otherwise, the goalie selects the position that minimizes the largest portion of unobstructed goal area, by finding the location that bisects the angles of the ball and the goal posts, as illustrated in Figure 3.




Figure 3: The goalie positions itself to minimize the unobstructed goal area.

The use of the predicted ball's velocity for the goalie's behavior was shown to be very effective in the RoboCup-98 games. It was particularly appropriate for defending a penalty shot, due to the accuracy of the predicted ball's trajectory when only one robot is pushing the ball.

Defender

The CMUnited-97's team did not have a well-specified defender's role, but our experience at RoboCup-97 made us understand that the purpose of a defending behavior is two-fold:

1. to stop the opponents from scoring in our goal; and
2. to not endanger our own goal.

The first goal is clearly a defender's role. The second goal comes as the result of the uncertain ball handling by the robots. The robots can easily push (or touch) the ball unexpectedly in the wrong direction when performing a difficult maneuver.

To achieve the two goals, we implemented three behaviors for the defender. *Blocking*, illustrated in Figure 4(a), is similar to the goalie's behavior except that the defender positions itself further away from the goal line. *Clearing*, illustrated in Figure 4(b), pushes the ball out of the defending area. It does this by finding

the largest angular direction free of obstacles (opponents and teammates) that the robot can push the ball towards. *Annoying*, illustrated in Figure 4(c), is somewhat similar to the goal-keeping behavior except that the robot tries to position itself between the ball and the opponent nearest to it. This is an effort to keep the opponent from reaching the ball.

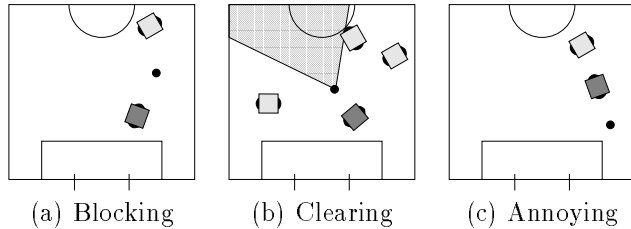


Figure 4: The defender’s behaviors. The dark and light robots represent the defender and the opponents respectively.

Selecting when each of these behaviors is used is very important to the effectiveness of the defender. For example, clearing the ball when it is close to our own goal or when it can bounce back off another robot, can lead to scoring in our own goal. We used the decision tree in Figure 5 to select which action to perform based on the current state.

The two attributes in the tree, namely *Ball Upfield* and *Safe to Clear*, are binary. *Ball Upfield* tests whether the ball is upfield (towards the opponent’s goal) of the defender. *Safe to Clear* tests whether the open area is larger than a preset angle threshold. If *Ball Upfield* is false then the ball is closer to the goal than the defender and the robot *annoys* the attacking robot. The CMUnited-98’s annoying behavior needs to select one particular opponent robot to annoy. For example, when two opponent robots attack simultaneously, the current annoying behavior is able to annoy only one of them. We are planning on further improving this behavior for RoboCup-99.




Figure 5: The decision tree for the defender’s behavior.

If *Ball Upfield* is true, the defender clears or blocks, depending on the value of *Safe to Clear*. Clearing was shown to be very useful at RoboCup-98, with even a couple of our goals scored directly by a clearing action of the defender.

Attackers - Anticipation

Attacking involves one of the best opportunities for collaboration, and much of the innovation of CMUnited-

98 has been developing techniques for finding and exploiting these opportunities.

In many multi-agent systems, one or a few agents are assigned, or assign themselves, the specific task to be solved at a particular moment. We view these agents as the *active* agents. Other team members are *passive* waiting to be needed to achieve another task or assist the active agent(s). This simplistic distinction between active and passive agents to capture teamwork was realized in CMUnited-97. The agent that goes to the ball is viewed as the active agent, while the other teammates are passive.

CMUnited-98 significantly extends this simplistic view in two ways: (i) we use a decision theoretic algorithm to select the active agent; and (ii) we use a technique for passive agents to *anticipate* future collaboration. Passive agents are therefore not actually “passive;” instead, they actively *anticipate* opportunities for collaboration. In CMUnited-98 this collaboration is built on robust individual behaviors.

Individual Behaviors. We first developed individual behaviors for passing and shooting. Passing and shooting in CMUnited-98 is handled effectively by the motion controller. The target configuration is specified to be the ball (using its estimated trajectory) and the target direction is either towards the goal or another teammate. This gives us robust and accurate individual behaviors that can handle obstacles as well as intercepting a moving ball.

Decision Theoretic Action Selection. Given the individual behaviors, we must select an active agent and appropriate behavior. This is done by a decision theoretic analysis using a single step look-ahead. With n agents this amounts to n^2 choices of actions involving shooting or a pass to another agent followed by that agent shooting. An estimated probability of success for each pass and shot is computed along with the time estimate to complete the action, which is provided by the motion controller. A value for each action is computed,

$$\text{Value} = \frac{\text{Pr}_{\text{pass}} \text{Pr}_{\text{shoot}}}{\text{time}}.$$

The action with the largest value is selected, which determines both the active agent and its behavior. Table 1 illustrates an example of the values for the selection considering two attackers, 1 and 2.

It is important to note that this action selection is occurring on each iteration of control, i.e., approximately 30 times per second. The probabilities of success, estimates of time, and values of actions, are being continuously recomputed. This allows for quick changes of actions if shooting opportunities become available or collaboration with another agent appears more useful.

Dynamic Positioning (SPAR). Although there is a clear action to be taken by the active agent, it is unclear what the passive agents should be doing. Al-

Attacker	Action	Probability of Success		Time(s)	Value
		Pass	Shoot		
1	Shoot	–	60%	2.0	0.30
1*	Pass to 2	60%	90%	1.0	0.54
2	Shoot	–	80%	1.5	0.53
2	Pass to 1	50%	40%	0.8	0.25

Table 1: Action choices and computed values are based on the probability of success and estimate of time. The largest-valued action (marked with an *) is selected.

though, in a team multi-agent system such as robotic soccer, success and goal achievement often depends upon collaboration; so, we introduce in CMUnited-98, the concept that team agents should not actually be “passive.”

CMUnited-97’s team architecture allowed for the passive agents to flexibly vary their positions within their role only as a function of the position of the ball. In so doing, their goal was to *anticipate* where they would be most likely to find the ball in the near future. This is a first-level of single-agent anticipation towards a better individual goal achievement (Veloso, Stone, & Han 1998).

However, for CMUnited-98, we introduce a team-based notion of *anticipation*, which goes beyond individual single-agent anticipation. The passive team members position themselves strategically so as to optimize the chances that their teammates can successfully collaborate with them, in particular pass to them. By considering the positions of other agents and the attacking goal, in addition to that of the ball, they are able to position themselves more usefully: they *anticipate* their future contributions to the team.

This strategic position takes into account the position of the other robots (teammates and opponents), the ball, and the opponent’s goal. The position is found as the solution to a multiple-objective function with repulsion and attraction points. Let’s introduce the following variables:

- n - the number of agents on each team;
- O_i - the position of opponent $i = 1, \dots, n$;
- T_i - the position of teammate, $i = 1, \dots, n$;
- B - the position of the active teammate and ball;
- G - the position of the opponent’s goal;
- P - the desired position for the passive agent in anticipation of a pass.

Given these defined variables, we can then formalize our algorithm for strategic position, which we call SPAR for *Strategic Positioning with Attraction and Repulsion*. This extends similar approaches using potential fields (Latombe 1991), to our highly dynamic, multi-agent domain. The probability of collaboration is directly related to how “open” a position is to allow

for a successful pass. SPAR maximizes the repulsion from other robots and minimizes attraction to the ball and to the goal, namely:

- *Repulsion* from opponents. Maximize the distance to each opponent: $\forall i, \max dist(P, O_i)$.
- *Repulsion* from teammates. Maximize the distance to other passive teammates: $\forall i, \max dist(P, T_i)$.
- *Attraction* to the ball: $\min dist(P, B)$.
- *Attraction* to the opponent’s goal: $\min dist(P, G)$.

This is a multiple-objective function. To solve this optimization problem, we restate this function into a single-objective function. This approach has also been applied to the CMUnited-98 simulator team (Stone, Veloso, & Riley 1999).

As each term in the multiple-objective function may have a different relevance (e.g., staying close to the goal may be more important than staying away from opponents), we want to consider different functions of each term. In our CMUnited-98 team, we weight the terms differently, namely w_{O_i} , w_{T_i} , w_B , and w_G , for the weights for opponents, teammates, the ball, and the goal, respectively. For CMUnited-98, these weights were hand tuned to create a proper balance. This gives us a weighted single-objective function:

$$\max \left(\frac{\sum_{i=1}^n w_{O_i} dist(P, O_i) + \sum_{i=1}^n w_{T_i} dist(P, T_i) - w_B dist(P, B) - w_G dist(P, G)}{\sum_{i=1}^n w_{O_i} dist(P, O_i) + \sum_{i=1}^n w_{T_i} dist(P, T_i) - w_B dist(P, B) - w_G dist(P, G)} \right)$$


This optimization problem is then solved under a set of constraints:

- Do not block a possible direct shot from active teammate.
- Do not stand behind other robots, because these are difficult positions to receive passes from the active teammate.

The solution to this optimization problem under constraints gives us a target location for the “passive” agent. Figure 6(a) and (b) illustrate these two constraints and Figure 7 shows the combination of these two set of constraints and the resulting position returned by our algorithm for the anticipating passive teammate.

Using this anticipation algorithm, the attacking team agents behaved in an exemplary collaborative fashion. Their motion on the field was a beautiful response to the dynamically changing adversarial environment. The active and passive agents moved in great coordination using the anticipation algorithm increasing very significantly successful collaboration. The SPAR anticipation algorithm created a number of opportunities for passes and rebounds that often led to goals and other scoring chances.

In general, we believe that our approach represents a major step in team multi-agent systems in terms of incorporating *anticipation* as a key aspect of teamwork.

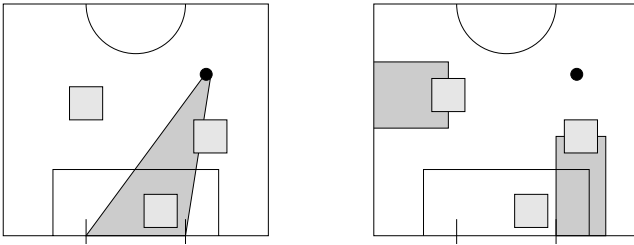

(a) Do not block goal shot (b) Avoid difficult collaboration

Figure 6: Constraints for the anticipation algorithm for the CMUnited-98 small robot team; (a) and (b) show three opponents robots, and the position of the ball (also the active teammate's).




Figure 7: Position of the passive agent, dark square, as returned by SPAR, using the constraints in Figure 6.

Results

CMUnited-98 successfully defended our title of the Small Robot Champion at RoboCup-98 in Paris. The competition involved 11 teams from 7 different countries. It consisted of a preliminary round of two games, followed by the 8 advancing teams playing a 3-round playoff. CMUnited-98 won four of five games, sweeping the playoff competition, scoring a total of 25 goals scored and only 6 suffered. The individual results of these games are in Table 2.

Opponent Name	Affiliation	Score
iXS	iXs Inc.	16-2
5DPO	University of Porto	0-3
Paris-8	University of Paris-8	3-0
Cambridge	University of Cambridge	3-0
Roboroos	University of Queensland	3-1
TOTAL		25-6

Table 2: The scores of CMUnited-98's games in the small-robot league of RoboCup-98.

There were a number of technical problems during the preliminary rounds, including outside interference with our radio communication. This problem was the worst during our game against 5DPO, in which our robots were often responding to outside commands just spinning in circles. This led to our forfeit at half time and a clear loss against 5DPO, a very good team which ended in third place at RoboCup-98. Fortunately, the communication problems were isolated and dealt with

prior to the playoff rounds.

The three playoff games were very competitive and showcased the strengths of our team. Paris-8 had a strong defense with a lot of traffic in front of the goal. Our team's obstacle avoidance still managed to find paths and to create scoring chances around their defenders. The final two games were very close against very good opponents. Our interception was tested against Cambridge, and included blocking a powerful shot by their goalie, which was deflected back into their goal. The final game against Roboroos demonstrated the dynamic positioning, especially during the final goal, which involved a pass to a strategically positioned teammate.

Conclusion

The success of CMUnited-98 at RoboCup-98 was due to several technical innovations, including robust hardware design, effective vision processing, reliable time-prediction based robot motion with obstacle avoidance, and a dynamic role-based team approach. The CMUnited-98 team demonstrated in many occasions its collaboration capabilities which resulted from the robots' behaviors. Most remarkably, CMUnited-98 introduces the concept of *anticipation*, in which passive robots (not going to the ball) strategically position themselves using attraction and repulsion (SPAR) to maximize the chances of a successful pass.

The CMUnited-98 team represents an integrated effort to combine solid research approaches to hardware design, vision processing, and individual and team robot behaviors.

Acknowledgments This research is sponsored in part by DARPA and AFRL grant F30602-97-2-0250, and in part by ONR grant N00014-95-1-0591. The views and conclusions in this document are solely those of the authors.

References

- Han, K., and Veloso, M. 1998. Reactive visual control of multiple non-holonomic robotic agents. In *Proceedings of the International Conference on Robotics and Automation*.
- Kitano, H.; Asada, M.; Kuniyoshi, Y.; Noda, I.; and Osawa, E. 1997. RoboCup: The robot world cup initiative. In *Proceedings of the First International Conference on Autonomous Agents*, 340-347.
- Latombe, J.-C. 1991. *Robot Motion Planning*.
- Stone, P., and Veloso, M. 1998. The CMUnited-97 simulator team. In Kitano, H., ed., *RoboCup-97: Robot Soccer World Cup I*. Berlin: Springer Verlag.
- Stone, P.; Veloso, M.; and Riley, P. 1999. The CMUnited-98 champion simulator team. In Asada, M., and Kitano, H., eds., *RoboCup-98: Robot Soccer World Cup II*. Berlin: Springer Verlag.
- Veloso, M.; Stone, P.; and Han, K. 1998. CMUnited-97: RoboCup-97 small-robot world champion team. *AI Magazine* 19(3):61-69.